



KWM
Gutterman

Panther 5" Seamless Rollformer


Standard Equipment

- Front pull guillotine
- Seven station aluminum box
- Emergency shutdown switch
- Easy adjust entrance guides
- Two quick release runout stands


Standard Upright System

- 2 spool upright & 2 aluminum spools
- New aluminum spools less than half the weight of steel spools
- Weight distributing upright system distributes the weight of the coils to the floor of the vehicle, not the machine

**2 Year
Warranty
Parts & Labor**

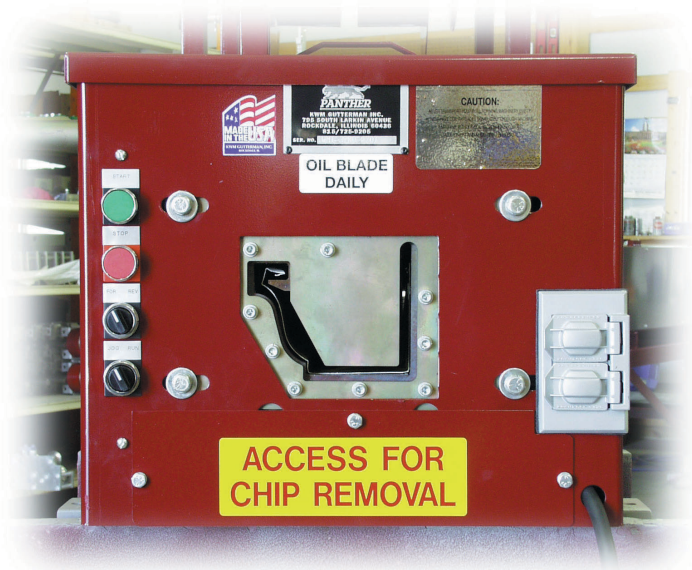

Front pull guillotine

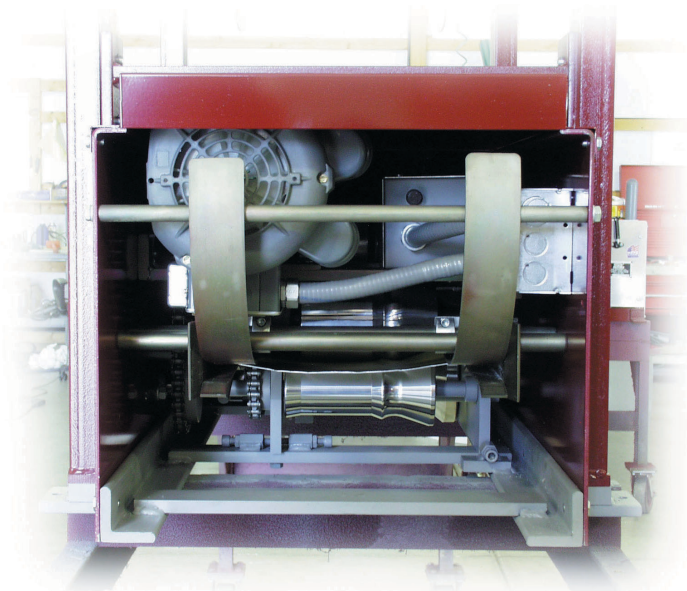

New easy-adjust entrance guides



795 South Larkin Avenue
Rockdale, Illinois 60436

Phone (815) 725-9205 • Fax (815) 725-4429

E-mail panther@kwmgutterman.com

www.kwmgutterman.com

Specifications

Dimensions

Top of spools to the bottom of machine 46".
23" Wide. Length 96" with straight blade
guillotine. 99" with front pull guillotine.

Construction

3/8" steel frame welded on a jig fixture
for accuracy. Fully enclosed with 7 gauge
steel sides. All parts individually painted
prior to assembly.

Drive/Forming Rollers

Twelve drive forming rollers—7 bottom,
5 top. Rollers are 1045 steel plated,
.002 industrial hard-chrome.

Weight

1,200 lbs.

Power

3/4 HP, 110 V. Single Phase,
13.6 ampere. Machine plugs directly
into 110-120V outlet.

Production

Approximately 35 feet per minute

Recommended Materials

11 3/4" to 12 3/8" wide

<i>Material</i>	<i>Maximum Gauge</i>
Aluminum	.032
Painted steel	26
Galvanized steel	26
Copper	16 oz. 3/4 hard

Options

- Straight blade guillotine
- Additional runout support stands
- 220 volt/50hz.
- Single, double or triple spool
upright available
- Machine mount cradle